


## AFTERMARKET HVAC MOTORS

### FAN COIL MOTORS

- Type: PSC
- Double shaft
- Volt: 115 / 60 Hz.
- Enclosure: open end-shields
- Protection: thermal
- Capacitor included
- Bearings: Ball Bearing **NEW!**
- Protection class: IP20
- Insulation class: B
- Base mount included
- Single packed
- Box dim.: 8" X 8" X 26"

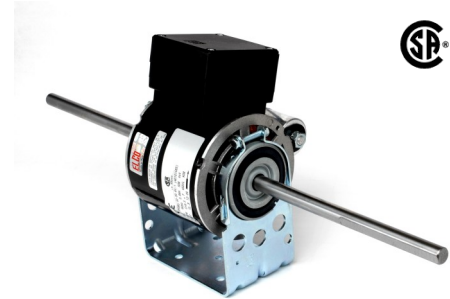

Stock #	Model	HP	Amps	Cap. (µF/V)	Speeds RPM	Rot.	Frame	Box wgt.	Shaft
EC-FC-1893 <sup>1</sup>	3RGBU 50-30-6V	1/15	0.96	6.3/450	6/1550	CW	4.0"	9 lbs.	1/2" x 7.26"
EC-FC-1895 <sup>2</sup>	3FGBU 210-51-6V	1/4	3.80	18/450	6/1550	CW	4.8"	16 lbs.	1/2" x 7.72"

<sup>1</sup> replaces EC-FC-1585    <sup>2</sup> replaces EC-FC-1587

### AXIAL FAN MOTORS


- Type: PSC
- Single shaft
- Volt: 115 / 60 Hz.
- Enclosure: totally enclosed
- Protection: thermal
- Capacitor included
- Bearings: Sintec sleeve
- Protection class: IP42
- Insulation class: B
- Mounting: on guard/grid
- Single packed
- Box dim.: 9" X 9" X 12"



Stock #	Model	HP	Amps.	Cap. (µF/V)	Speeds RPM	Rot.	Frame	Box wgt.	Shaft
EC-AF-1586	3RGMU 45-20	1/16	0.94	8/450	2/1550	CW	4.0"	7 lbs.	1/2" x 3.94"
EC-AF-1616	3RGMU 90-50-2V	1/8	1.60	14/450	2/1550	CW	4.0"	10 lbs.	1/2" x 3.94"
EC-AF-1617	3FGMU 145-70-6-2V	1/5	2.45	16/450	2/1090	CW	4.8"	17 lbs.	1/2" x 3.94"

### MAKE UP AIR UNIT MOTORS

- Type: PSC
- Single shaft
- Volt: 115 / 60 Hz.
- Enclosure: open shields
- Protection: thermal
- Capacitor not included
- Bearings: Sintec sleeve
- Protection class: IP20
- Insulation class: B
- Mounting: 3@120° on 6.5" ØBC
- Single packed
- Box dim.: 8" X 8" X 8"

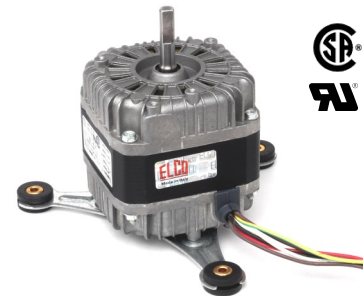

Stock #	Model	HP	Amps.	Cap. (µF/V)	Speeds RPM	Rot.	Frame	Box wgt.	Shaft
EC-MA-7004	3FBTU 40-30	1/17	1.00	10/450	2/1600	CCW	3.3"sq.	5 lbs.	3/8" x 13.3"

Note: Rotation from shaft end.