

Little GIANT[®]

CP SERIES



CP1 Series — 5,000–7,000 CFM
CP2 Series — 7,500–15,000 CFM
CP3 Series — 15,000–21,000 CFM

Features


- Thermal overload protection
- Heavy-duty concentric fan-cooled motor with oversized sleeve bearings and moisture proof windings
- For residential and commercial cooler applications
- Corrosion resistant one-piece steel shaft
- Snap-off volute plate for easy cleaning
- Flame retardant housing
- Universal mounting configurations
- 90° barbed elbow with bleed-off port
- 4' power cord with three-prong plug
- Low pump down and recovery levels
- Mesh screen
- Liquid Temp. up to — 120° F

Construction

- Motor — Heavy duty fan cooled
- Housing — Flame resistant engineered thermal plastic
- Cover — Flame resistant engineered thermal plastic
- Volute — Flame resistant engineered thermal plastic
- Impeller — Polyester
- Mounting Bracket — Galvanized steel

Little Giant Pump Company's line of non-submersible Evaporative Cooler Pumps is designed to give years of trouble-free service in recirculating applications as replacement units for original equipment. For use in evaporative coolers, displays, laboratories, water transfer, and other applications.

CP SERIES

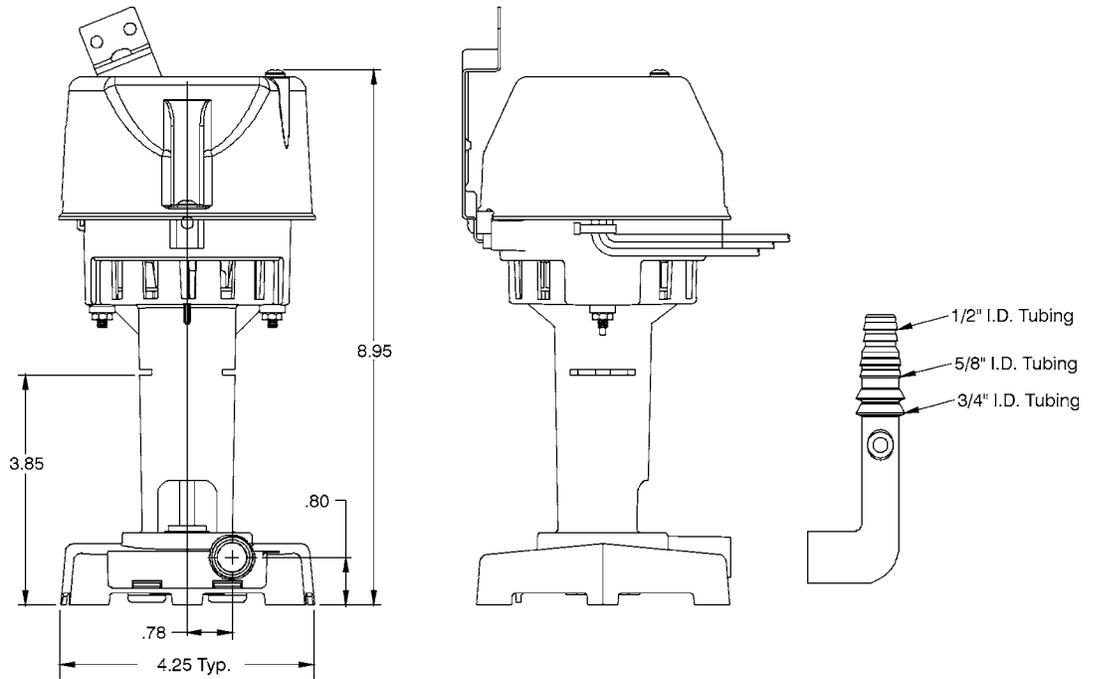

Specifications

Model No.	Item No.	Discharge	Listings	HP	Volts	Hertz	Amps	Watts	Performance (GPH @ Head)				Shut Off		Pwr. Cord (ft.)	Weight (lbs.)
									1'	3'	5'	10'	Feet	PSI		
CP1-115	540005	1/2", 5/8", 3/4"	UR	1/70	115/127	60	.8	70	307	265	213	—	9.5	4.1	4	2.5
CP1-230	540015	1/2", 5/8", 3/4"	UR	1/70	230	50/60	.4	70	307	265	213	—	9.5	4.1	4	2.5
CP2-115	541005	5/8", 3/4"	UR	1/50	115	60	1.0	80	502	440	371	89	11	4.8	4	3.0
CP2-230	541015	5/8", 3/4"	UR	1/50	230	50/60	.5	80	502	440	371	89	11	4.8	4	3.0
CP3-115	542005	5/8", 3/4"	UR	1/30	115	60	1.1	90	563	512	460	231	12	5.2	4	3.5
CP3-230	542015	5/8", 3/4"	UR	1/30	230	50/60	.56	90	563	512	460	231	12	5.2	4	3.5

