

# CA- INDUSTRIAL GRADE CIRCULATING FANS

Canarm LFI's CA circulating fans economically provide relief from summer heat by creating a gentle air movement. They effectively cool large areas in factories, stores, restaurants and other public places. These fans have a low RPM motor which allows them to operate quietly.

The Floor Pedestal type fans come with a sturdy base and are supported by an adjustable tubular steel post which provides maximum stability. The Wall Mount fans are anchored with a sturdy wall bracket. There is also an optional ceiling mount.

On all fan models, the fan assembly can be tilted on a swivel bracket to direct air stream upwards or downwards. Available with oscillating motor on the pedestal and wall models.

## FEATURES

- Rugged, high performance model.
- Available in 24" & 30" sizes.
- 1/4 HP, 3 speed, totally enclosed ball bearing motor with thermal overload protection.
- Fan motor RPM - 1100/950/850.
- Available with oscillating motor on the pedestal and wall models.
- Heavy gauge aluminum, well balanced fan blades.
- Air stream adjustable in all directions.
- Complete with 10', 120V grounded cord set.
- Attractive powder coated front and rear guards, meet OSHA standards.





MODEL NUMBER	FAN SIZE	DESCRIPTION	CFM	VOLT	AMPS	SHPG. WGT. (LBS)
<b>PEDESTAL FANS</b>						
CA24P-C	24"	3 SPEED	7100/6300/5300	115	2.7	60
CA24POSC-C		3 SPEED OSCILLATING	7100/6300/5300	115	2.7	60
CA30P-C	30"	3 SPEED	8300/7300/6300	115	2.7	83
CA30POSC-C		3 SPEED OSCILLATING	8300/7300/6300	115	2.7	83
<b>WALL MOUNTING FANS</b>						
CA24W-C	24"	3 SPEED	7100/6300/5300	115	2.7	40
CA24WOSC-C		3 SPEED OSCILLATING	7100/6300/5300	115	2.7	40
CA30W-C	30"	3 SPEED	8300/7300/6300	115	2.7	50
CA30WOSC-C		3 SPEED OSCILLATING	8300/7300/6300	115	2.7	50
<b>HEADS ONLY</b>						
CA24-C	24"	3 SPEED	7100/6300/5300	115	2.7	40
CA24OSC-C		3 SPEED OSCILLATING	7100/6300/5300	115	2.7	40
CA30-C	30"	3 SPEED	8300/7300/6300	115	2.7	50
CA30OSC-C		3 SPEED OSCILLATING	8300/7300/6300	115	2.7	50

FAN HEAD MOUNTING ACCESSORIES CAN BE FOUND ON PAGE 31.

## VELOCITY MAPPING CHARTS


These charts indicate the air distribution patterns of the CA fans. They are a graphic illustration of air velocity in feet per minute.

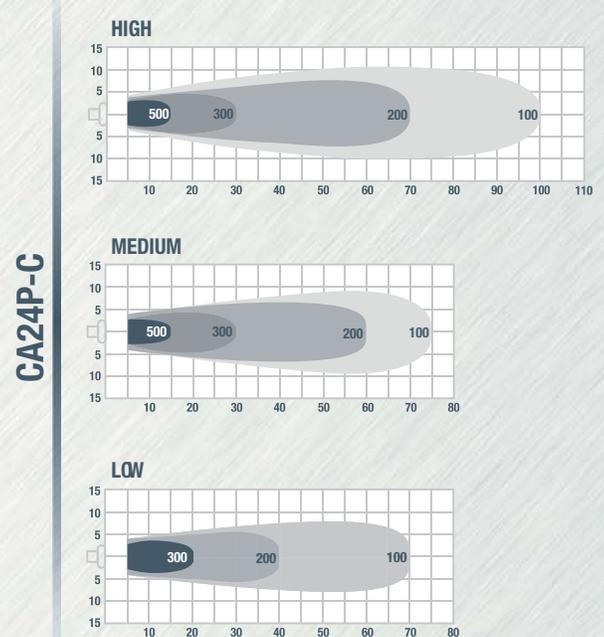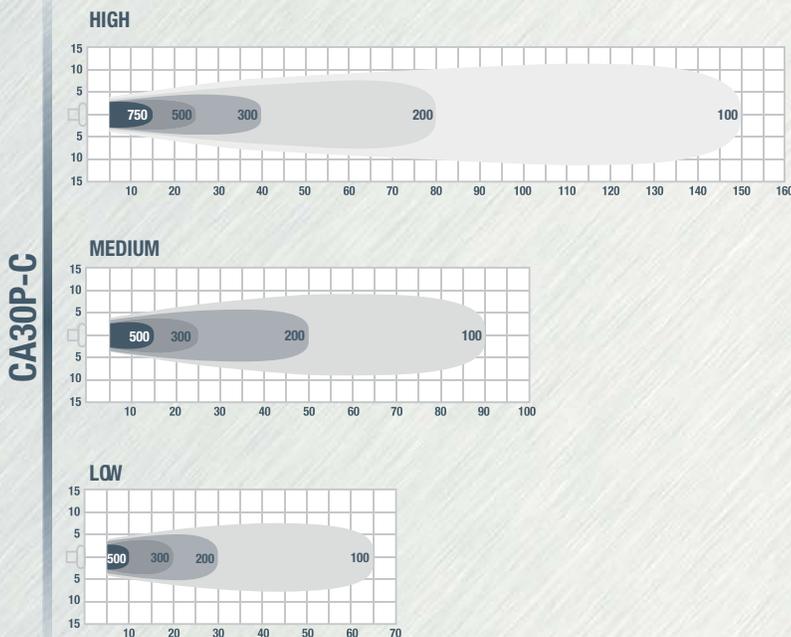

# CFH - INDUSTRIAL CIRCULATING FAN (HEAD ONLY)

## FEATURES

- Industrial duty circulating fans.
- Aluminum blades.
- Standard OSHA guard.
- Totally enclosed motor with overload protection.
- Optional mounting accessories: adjustable pedestal base, heavy duty wall bracket, heavy duty ceiling mount, or dock arm.
- Some models are available in 50 HZ, explosion proof, three phase and washdown duty. Consult factory for details.

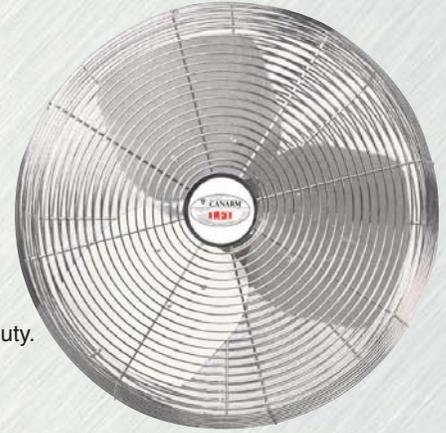

		MODEL	H.P.	RPM	DESCRIPTION	CFM	SHIPPING WEIGHT
FAN SIZE	12"	CFH12-1	1/4	1725	SINGLE SPEED	1800	25 lbs
		CFH12-6	1/3	1075/860	TWO SPEED OSCILLATING	1800/1440	28 lbs
		CFH12-8	1/4	1075/860	TWO SPEED	1800/1440	25 lbs
	16"	CFH16-1	1/4	1725	SINGLE SPEED	3800	28 lbs
		CFH16-6	1/3	1075/860	TWO SPEED OSCILLATING	3300/2640	34 lbs
		CFH16-8	1/4	1075/860	TWO SPEED	3300/2640	30 lbs
	18"	CFH18-1	1/4	1725	SINGLE SPEED	4800	31 lbs
		CFH18-6	1/3	1075/860	TWO SPEED OSCILLATING	4500/3600	36 lbs
		CFH18-8	1/4	1075/860	TWO SPEED	4500/3600	33 lbs
	20"	CFH20-1	1/3	1725	SINGLE SPEED	7000	37 lbs
		CFH20-6	1/3	1075/860	TWO SPEED OSCILLATING	6700/5360	40 lbs
		CFH20-8	1/3	1075/860	TWO SPEED	6700/5360	38 lbs
24"	CFH24-1	1/3	1725	SINGLE SPEED	7900	42 lbs	
	CFH24-6	1/3	1075/860	TWO SPEED OSCILLATING	7600/6080	45 lbs	
	CFH24-8	1/3	1075/860	TWO SPEED	7600/6080	42 lbs	

## MOUNTING ACCESSORIES



CFKPB



CFWB



CFCM



DF36X36

MODEL	DESCRIPTION	WEIGHT
CFKPB	KNOCK DOWN PEDESTAL BASE	36 lbs
CFWB	WALL BRACKET	6 lbs
CFCM	CEILING MOUNT (NON OSCILLATING FANS ONLY)	9 lbs
DF36X36	DOCK ARM	-

# PBKD /WMKD - COMMERCIAL CIRCULATING FANS

Canarm/LFI's high velocity commercial fans economically provide relief from summer heat by creating a gentle air movement. Pedestal type fans come with a sturdy base and adjustable pole. All fans have a 3 speed motor with industrial grade aluminum blades.



## FEATURES

- Commercial duty circulating fans (Knock Down).
- Painted aluminum blades.
- Standard OSHA guard.
- Motors are thermally protected.
- Available in 24" and 30" stationary and oscillating models.
- Packaged in one box, complete with mounting accessories.
- Complete with 10', 120V grounded plug.



FAN SIZE	MODEL NUMBER & WEIGHT (LBS)				DESCRIPTION	H.P.	SUPPLY CFM
	PEDESTAL FAN	WEIGHT (LBS)	WALL MOUNT FAN	WEIGHT (LBS)			
24"	<b>PBKD24-3SP</b>	74	<b>WMKD24-3SP</b>	38	3 Speed	1/4	6600/5900/4900
24"	<b>PBKD24-OSC</b>	78	<b>WMKD24-OSC</b>	42	3 Speed Oscillating	1/4	6600/5900/4900
30"	<b>PBKD30-3SP</b>	80	<b>WMKD30-3SP</b>	46	3 Speed	1/4	8300/7300/6300
30"	<b>PBKD30-OSC</b>	84	<b>WMKD30-OSC</b>	49	3 Speed Oscillating	1/4	8300/7300/6300

# CCU - COMMERCIAL CIRCULATING FANS

Canarm/LFI's high velocity commercial fans economically provide relief from summer heat by creating a gentle air movement. Pedestal type fans come with a sturdy base and adjustable pole. All fans have a 3 speed motor with industrial grade aluminum blades.



## FEATURES

- Commercial duty circulating fans (Knock Down).
- 20" stationary models.
- Adjustable pedestal (54"-64") or wall mount bracket.
- 3 speeds.
- Painted aluminum blades.
- Standard OSHA guard.
- Motors are thermally protected.
- Complete with 10', 120V grounded plug.
- 20" pedestal complete with wheel kit.



MODEL	FAN SIZE	DESCRIPTION	H.P.	SUPPLY CFM	WEIGHT (LBS)
<b>CCUW20</b>	20"	3 Speed Wall Fan	1/4	6200/5200/4200	26
<b>CCUP20</b>	20"	3 Speed Pedestal Fan	1/4	6200/5200/4200	47