



WHERE INNOVATION IS A STANDARD



DON'T GET CAUGHT WITH YOUR FANS DOWN !

True sizes in inches, eliminating duct adapters.

Aerodynamic design allowing more air flow.

Heavy gage steel casing with a Baked Hammertone epoxy finish, making it more sound absorbing, durable, impact resistant and rustproof.



High quality maintenance-free balanced motor, making it vibration free, quieter and longer lasting.

Extended collar and lip, allowing easy duct hook-up.

Optional speed control easing air flow adjustment, allowing better balancing of the ventilation system.

120V, 6 foot power cord, ready to plug in.

VTX Series Basic Performance Data

FAN MODEL	Duct Dia.	Weight (lbs)**	CFM at 0 inch W.G.
VTX400	4"	7.4	177
VTX500	5"	7.0	204
VTX600L	6"	6.8	235
VTX600	6"	10.8	452
VTX800L	8"	12.0	591
VTX800	8"	12.2	747
VTX1000	10"	12.4	790
VTX1200L	12"	14.4	820
VTX1200	12"	14.6	1140



Silence **POWER** Efficiency

CONFORMS TO UL 507 and CSA C22.2 no.113






WHERE INNOVATION IS A STANDARD




VTX Series Overall View & Sizes

FAN MODEL	Weight (lbs)**	*A inches	B inches	C inches
VTX400	7.4	4.0	8.5	9.5
VTX500	7.0	5.0	8.5	9.5
VTX600L	6.8	6.0	8.5	9.5
VTX600	10.8	6.0	10.5	13.0
VTX800L	12.0	8.0	10.5	13.0
VTX800	12.2	8.0	10.5	13.0
VTX1000	12.4	10.0	10.5	13.0
VTX1200L	14.4	12.0	12.3	16.0
VTX1200	14.6	12.0	12.3	16.0

* Represents Duct Dimensions
 ** Mounting Bracket not included

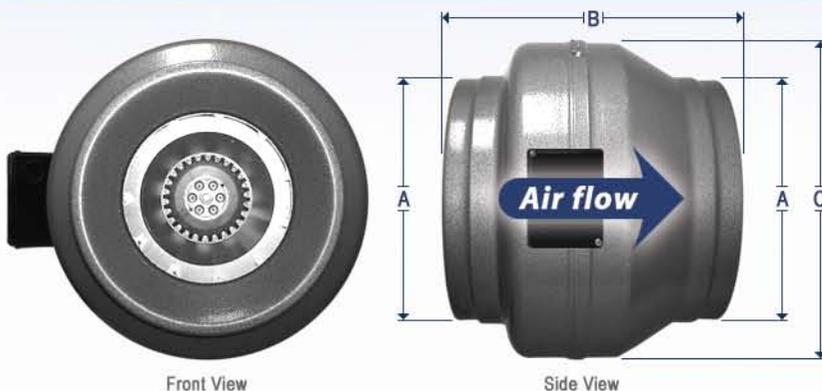

VTX Series Air Performance Graph

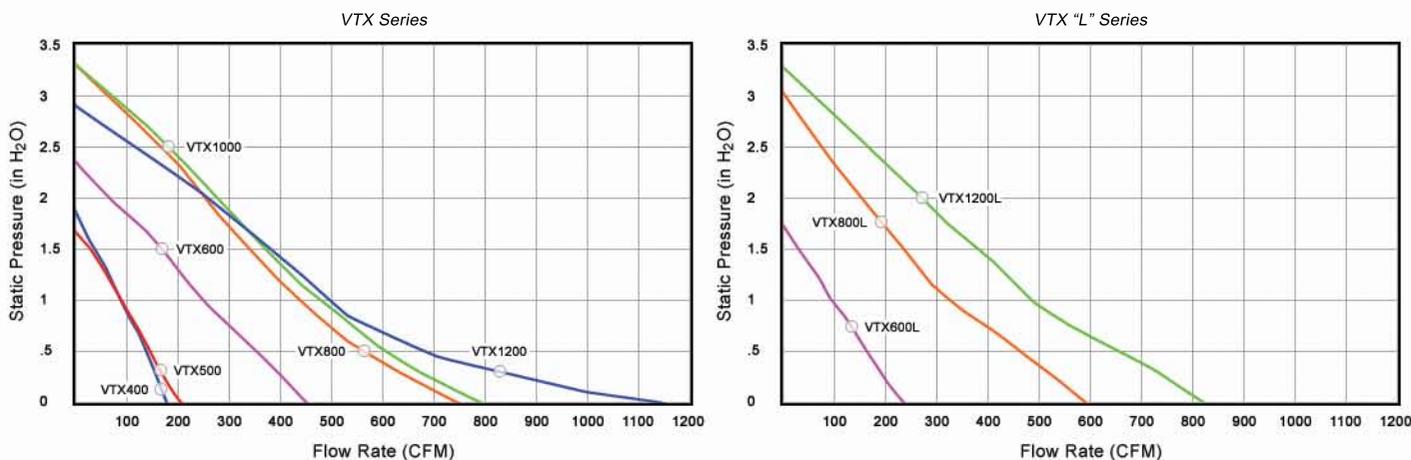

VTX Series Performance Data

All VTX products incorporate motors suitable for 120 Volts AC 60Hz electrical supply only.

FAN MODEL	Duct Dia.	RPM	Volts	Max. Watts	Max. Amps	Static Pressure in Inches W.G.										MAX Ps
						0"	.125"	.25"	.375"	.5"	.75"	1.0"	1.25"	1.5"		
VTX400	4"	2500	115	92	0.8	177	167	156	149	136	113	88	65	35	1.86	
VTX500	5"	2500	115	92	0.8	204	188	172	161	145	117	91	60	29	1.66	
VTX600L	6"	2500	115	89	0.7	235	217	197	183	164	123	96	67	30	1.72	
VTX600	6"	2800	115	136	1.2	452	424	402	377	349	297	251	207	169	2.34	
VTX800L	8"	2550	115	192	1.7	591	568	531	502	463	396	332	272	233	3.02	
† VTX800	8"	2750	115	257	2.2	747	704	656	617	565	503	437	388	343	3.31	
† VTX1000	10"	2750	115	252	2.2	790	749	703	647	598	543	481	416	367	3.30	
VTX1200L	12"	2750	115	253	2.2	820	785	752	708	661	558	483	431	387	3.27	
† VTX1200	12"	2400	115	284	2.4	1140	1013	882	762	688	567	498	442	388	2.91	

† These models are under revision and performance data is subject to change without notice.
 - Tested in accordance with 210/55 standard.

CONFORMS TO UL 507 and CSA C22.2 no.113

