

# NXTGen™

## VCMX



VCMX-20ULS



VCMX-20ULST



VCMX-20UL




VCMX-20ULS-C

### Features:

- Slimmer Footprint: 4.8" x 10.2" x 6.5" size
- Oil Resistant Tank and Check Valve
- 1/4-Turn Check Valve
- External Overflow Safety Switch
- External Test/Run Lever
- Patent-Pending Cooling Design
- External Tank Anti-Sweat Sleeve
- Multiple Brackets: steel mounting bracket for use on either side of the tank
- 20' Shut-off head (115v Models)
- 6' power cord
- Two-Year Warranty
- Rubber Feet
- Thermal overload protection
- cCSAus listed
- Vertical type pump unit

## Engineering Data

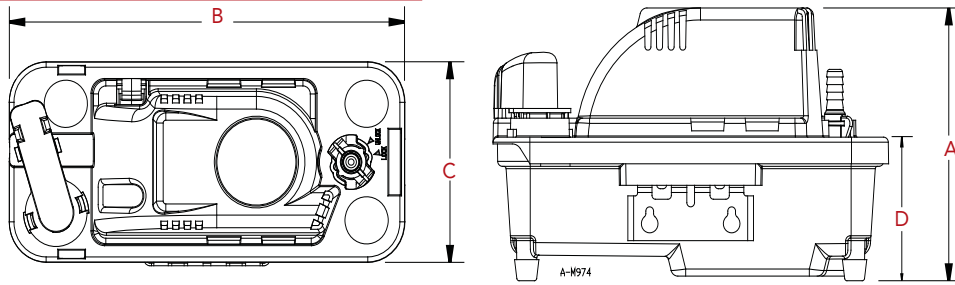

## Dimensions

Model No	DIM "A"	DIM "B"	DIM "C"	DIM "D"
VCMX-20UL	6.5" (165.1mm)	10.2" (259.1 mm)	4.8" (121.9 mm)	3.4" (86.4 mm)
VCMX-20ULS	6.5" (165.1mm)	10.2" (259.1 mm)	4.8" (121.9 mm)	3.4" (86.4 mm)
VCMX-20ULST	6.5" (165.1mm)	10.2" (259.1 mm)	4.8" (121.9 mm)	3.4" (86.4 mm)
VCMX-20ULS-C	6.8" (172.7mm)	10.3" (261.6 mm)	5.1" (129.5 mm)	3.4" (86.4 mm)

## Specifications

### NXTGen™

#### Performance (GPH @ Height in Feet)

Model No	Item No	Listing	Volts	Hz	Amps	Watts	Check Valve	Safety Switch	1	5	10	15	20	Shutoff (Feet)	Cord
554520	VCMX-20UL	cCSAus	115	60	1.5	93	3/8"	No	84	75	60	42	10	21	6'
554521	VCMX-20UL	cCSAus	230	50/60	0.6/0.5	75	3/8"	No	78	67	51	29	0	19	6'
554530	VCMX-20ULS	cCSAus	115	60	1.5	93	3/8"	Yes	84	75	60	42	10	21	6'
554531	VCMX-20ULS	cCSAus	230	50/60	0.6/0.5	75	3/8"	Yes	78	67	51	29	0	19	6'

### NXTGen™ with tubing

#### Performance (GPH @ Height in Feet)

Model No	Item No	Listing	Volts	Hz	Amps	Watts	Check Valve	Safety Switch	1	5	10	15	20	Shutoff (Feet)	Cord
554550	VCMX-20ULST	cCSAus	115	60	1.5	93	3/8"	Yes	84	75	60	42	10	21	6'
554551	VCMX-20ULST	cCSAus	230	50/60	0.5	75	3/8"	Yes	80	69	54	36	0	20	6'


### NXTGen™ with Anti-Sweat Sleeve

#### Performance (GPH @ Height in Feet)

Model No	Item No	Listing	Volts	Hz	Amps	Watts	Check Valve	Safety Switch	1	5	10	15	20	Shutoff (Feet)	Cord
554542	VCMX-20ULS-C	cCSAus	115	60	1.5	93	3/8"	Yes	84	75	60	42	10	21	6'

## Construction

Motor	1/30 HP
Liquid Temperature	Up to 120°
Tank	Polypropylene
Cover	ABS
Volute	ABS
Impeller	Polypropylene
Check Valve	Acetal
Float	ABS

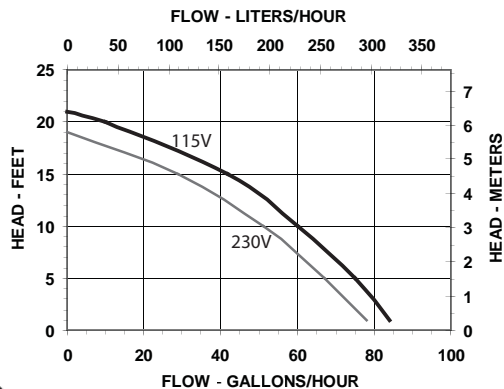

## Replacement Parts

Item	Part Number
Tank	154390
Feet, Rubber (4 pack 554520, 554530, 554550, 554551, 554521, 554531)	925047
Cover, Motor	154425
Float Arm Assembly	154460
Check Valve, 3/8"	154724
Safety Switch Assembly (554530, 554550, 554551, 554542, 554531)	599136
Anti-Sweat Sleeve and Bracket (554542)	599138
Bracket, Tank (554520, 554530, 554550, 554551, 554521, 554531)	154483



**Franklin Electric**

P.O. Box 12010  
Oklahoma City, OK 73157-2010  
Phone: 1.800.701.7894  
Fax: 1.800.678.7867  
www.LittleGiantPump.com